

TEMACARB

General data

Standard sheet size:

- 1,5 x 1,5 m
- 1,5 x 1,0 m
- 1,5 x 3,0 m

Another sheet sizes are available upon the customer request.

Size tolerance: $\pm 2 \%$

Standard thickness:

- 0,4 – 6,4 mm
- with wire insertion:
- 0,8 – 6,4 mm

Thickness tolerance:

- 0,4 – 0,8 $\pm 0,1$ mm
- 1,0 – 6,4 $\pm 10 \%$

Surface:

All jointings are produced with an antistick surface on one side.

Wire insertion:

Majority of the styles can be supplied with a wire insertion.

Technical data

Marking acc. to	DIN 28 091-2	FA-CA-1-0 (ST)	
Marking acc. to	ASTM F 104	F712 110 M6 (M7)	
Max. temperature	peak	°C	450
	continual	°C	250 (steam 250)
Max. pressure	Bar	100	


Typical parameters of 2 mm thick jointing

Density	DIN 28090-2	g/cm ³	1,9
Compressibility	ASTM F 36J	%	9
Recovery min.	ASTM F 36J	%	50
Residual stress (16h/175°C)	DIN 52 913	≈ MPa	32
Gas leakage $\lambda_{2,0}$	DIN 3535-6	≈ mg/(m.s)	0,05
Fluid resistance - thickness increase			
Oil IRM 903 (5h/150°C)	ASTM F 146	%	3
ASTM Fuel B (5h/23°C)	ASTM F 146	%	5


- 1 – suitable area (even for steam application)
- 2 – suitable extended area, technical advice is recommended
- 3 – for this area technical consultation is mandatory

Note: Maximum temperature and pressure values can not be used simultaneously.

TEMACARB



Colour	Black
Description	Premium quality carbon fibre reinforced material with a high quality nitrile rubber binder.
Application	A universal grade especially suitable for use under alkaline conditions, with good steam resistance. It also possesses excellent creep resistance and is suitable for applications with oils, fuels, alkalis medium and refrigerants.
Chemical resistance chart available upon request.	
Certification	GOST
Updated information can be found on our websites.	

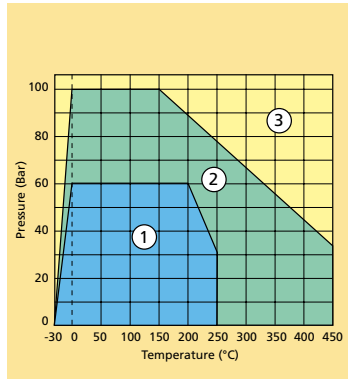

Chemical resistance table

	Temafast Economy	Temafast	Temasil Nová Generace	Temasil HT	Temaplus	Temacarb	Graftem Economy	Temacid
Acetic acid 100%	C	C	A	A	A	A	A	A
Acetone	B	B	B	B	B	B	B	A
Acetylene	A	A	A	A	A	A	A	A
Air	A	A	A	A	A	A	A	A
Aluminium chloride	A	A	A	A	A	A	A	A
Ammonia	B	B	A	A	A	A	A	A
Ammonium hydrogenphospate	B	B	A	A	A	A	A	A
Barium chloride	A	A	A	A	A	A	A	A
Benzene	B	B	A	A	A	A	A	A
Boric acid	B	B	A	A	A	A	A	A
Calcium hydroxide	B	B	A	A	A	A	A	A
Carbon dioxide	A	A	A	A	A	A	A	A
Copper sulphate	A	A	A	A	A	A	A	A
Crude oil	C	C	A	A	A	A	A	A
Cyclohexanol	B	B	A	A	A	A	A	A
Cyklohexanon	C	C	B	B	B	B	B	B
Di-butyl phtalate	A	A	A	A	A	A	A	A
Ethyl ether	B	A	A	A	A	A	A	A
Ethylen	A	A	A	A	A	A	A	A
Ethylene glycol	B	B	A	A	A	A	A	A
Formic acid 10%	B	B	A	A	A	A	A	A
Glycerine	A	A	A	A	A	A	A	A
Hydraulic oil(mineral)	B	B	A	A	A	A	A	A
Hydrogen chloride dry	B	B	A	A	A	A	A	A
Hydrochlorid acid 20%	C	C	B	B	A	A	B	A
Chlorine dry	B	B	A	A	A	A	A	A
Chloroform	C	C	B	B	B	B	B	B
Iso-Octane	B	B	A	A	A	A	A	A
Kerosene	B	B	A	A	A	A	A	A
Methylene chloride	C	C	C	C	C	C	C	C
Natural gas	A	A	A	A	A	A	A	A
Nitric acid 20%	C	C	C	C	C	B	C	A
Nitrogen	A	A	A	A	A	A	A	A
Petrol	B	B	A	A	A	A	A	A
Petroleum	B	B	A	A	A	A	A	A
Phenol	C	C	C	C	C	C	C	B
Potable water	A	A	A	A	A	A	A	A
Potassium cyanide	B	B	A	A	A	A	A	A
Potassium iodide	A	A	A	A	A	A	A	A
Saturated steam	B	B	A	A	A	A	A	B
Silicon oil	B	B	A	A	A	A	A	A
Sodium carbonate	A	A	A	A	A	A	A	A
Sodium hydrogen carbonate	B	B	A	A	A	A	A	A
Sodium hydrogen sulphite	B	B	A	A	A	A	A	A
Sodium hydroxide	B	B	B	B	B	B	B	A
Sodium chloride	A	A	A	A	A	A	A	A
Sodium sulphate	A	A	A	A	A	A	A	A
Sugar	A	A	A	A	A	A	A	A
Sulphuric acid 65%	C	C	C	C	C	C	C	A
Tartaric acid	A	A	A	A	A	A	A	A
Tetrachlormethane	C	C	B	B	B	B	B	B
Toluene	C	C	A	A	A	A	A	A
Transformer oil	B	B	A	A	A	A	A	A
Turpentine	A	A	A	A	A	A	A	A
Xylene	B	B	A	A	A	A	A	A

A-recomended

B-suitability depends on conditions

C-not suitable

If another medium is applied please
contact our technical department.